



DAVEY Filtration & Purification

TWIN FILTER HOUSING KITS

FEATURES & BENEFITS

- Material of construction is glass reinforced polypropylene
- Jumbo housings take cartridges of 114mm OD (4.5")
- This heavy-duty water filter system double filters the water, and ensures maximum cartridge life for medium to large families
- Install two kits in parallel when higher flow rates are required

Rainwater Solutions

- KAS10J - Jumbo Twin 10" Housings supplied with matching filter cartridges:
20 micron poly pleated (for larger sediment, dirt, rust and leaf matter) and **1 micron poly spun** (for parasitic cysts and fine particle sediment)
- KAS20J - Jumbo Twin 20" Housings supplied with matching filter cartridges:
20 micron poly pleated (for larger sediment, dirt, rust and leaf matter) and **1 micron poly spun** (for parasitic cysts and fine particle sediment) filter cartridge

Model Number:
AS10J, AS20J, KAS10J, KAS20J,
KAS10JM, KAS20JM

WARRANTY
1 YEAR Housings


APPLICATIONS

Twin Housing Kits suitable for all applications where cartridge filtration is required. Stand alone 10" Jumbo and 20" Jumbo twin kits with matching filter cartridge options.

Mains Water Solutions

- KAS10JM - Jumbo Twin 10" Housings supplied with matching filter cartridges:
5 micron poly spun (for sediment found in mains supply), and **5 micron carbon block** (for taste and odour)
- KAS20JM - Jumbo Twin 20" Housings supplied with matching filter cartridges:
5 micron poly spun (for sediment found in mains supply), and **5 micron carbon block** (for taste and odour)

DIMENSIONS (mm)

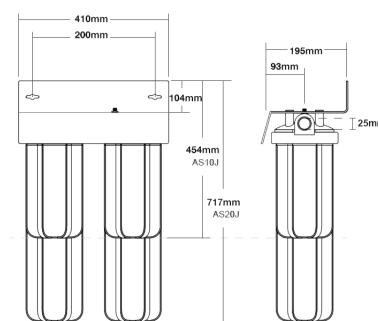

Water Filtration & Purification

DAVEY

| OPERATING LIMITS | | | | | | |
|-----------------------------|---|---------|---|--------|---|--|
| Application | Twin Housings Only | | Rainwater Solutions | | Mains Water Solutions | |
| Model | AS10J | AS20J | KAS10J | KAS20J | KAS10JM | |
| 1st Filter | None Included (left open for other tailored requirements) | | 20 micron Poly Pleated (for larger sediment, dirt, rust and leaf matter), recommended cleaning every 3 – 6 months and replacing every 12 months | | 5 micron Poly Spun (for finer sediment found in mains water) recommended replacing every 6 – 12 months | |
| 2nd Filter | None Included (left open for other tailored requirements) | | 1 Micron Poly Spun (for parasitic cysts and fine particle sediment) recommended replacing every 6 – 12 months | | 5 micron Carbon Block (for taste and odour) recommended replacing every 6 – 12 months or earlier if taste and odour becomes present | |
| Connections | 25mm(1") FBSP | | | | | |
| Recommended max flow | 125 lpm | 155 lpm | | | | |
| Max system pressure | 880kPa (128PSI) | | | | | |
| Water temperature | 0 - 40°C | | | | | |
| Maximum ambient temperature | 50°C | | | | | |
| Other inclusions | Housing spanner, fixings for bracket | | | | | |

| HOUSINGS | RAINWATER SOLUTIONS | MAINS WATER SOLUTIONS |
|---|---|--|
| AS10J | KAS10J | KAS10JM |
|  |  20PP10J 1PS10J |  5PS10J ACB10J |
| AS20J | KAS20J | KAS20JM |
|  |  20PP20J 1PS20J |  5PS20J ACB20J |



daveywater.com

This literature is not a complete guide to product usage. All images provided in this document are for illustration purposes only. Further information is available from your Davey Dealer, Davey Support Centre and from the relevant product Installation and Operating Instructions. Must be read in conjunction with the relevant product Installation and Operating Instructions and all applicable statutory requirements. Product specifications may change without notice. © Davey is a registered trademark of Davey Water Products Pty Ltd. © Davey Water Products Pty Ltd 2025.

DAVEY